


SG-28AHD-10SZ2

Low Light



- 1920(H)x1080(V) (AHD) Zoom Camera
- 1/3" Panasonic 2.1M CMOS Sensor
- Color: 0.05Lux@F1.8, B/W: 0.02Lux@F1.8, IR ON:0Lux@F1.8
- Optical 10X Zoom
- Push AF & Auto IRIS Zoom Lens
- Simultaneous Video Output: AHD / Composite BNC
- OSD Menu Control
- Powerful WDR & Anti-Headlight (HLC)
- Fog Reduction & 3D/2D Noise Reduction



| | | |
|----------|------------------------------|--|
| Video | Video System | PAL / NTSC Selectable |
| | Image Sensor | 1/3" Panasonic 2.1M CMOS Sensor |
| | Resolution | 1920(H)x1080(V) |
| | Frame Rates | 1920x1080P@25/30fps |
| | AHD Standards | AHD |
| | Minimum Illumination | Color: 0.05Lux@F1.8, B/W: 0.02Lux@F1.8, IR ON:0Lux@F1.8 |
| | Wide Dynamic Range | 120dB |
| | Digital Video Output | AHD 1080p |
| | Analog Video Output | CVBS (1.0Vp-p Composite, 75Ω) |
| | Audio | NA |
| | Mechanical IR Cut Filter | Automatically Switches (Switching Lux Level can be adjusted) |
| | IR LED ; Working Distance | 30 units(6pcs High Power) ; 20~30m |
| Function | OSD Menu | OSD Control / CoC |
| | Title | TITLE (LOCATION) |
| | Digital Day&Night Mode | COLOR / B&W / AUTO / IR Sync |
| | Electronic Shutter | AUTO:1/25(30)~1/30, 000 Sec, Flickerless; MANUAL: 1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 Sec |
| | Auto Gain Control | 0~20 steps |
| | White Balance | ATW / AWB / PWB(Push Lock) / Manual |
| | WDR;BLC;HLC | HIGH (Max 90dB) / MIDDLE / LOW / OFF ; Program ; ON/OFF |
| | Flickerless | PAL 50Hz / NTSC 60Hz / OFF |
| | Fog Reduction | Auto/Manual/Off ; Level: High/Middle/Low |
| | Dynamic Noise Reduction | HIGH / MIDDLE / LOW / OFF |
| | Sense Up | ON (x2, x4, x8, x16, x32) / OFF |
| | Digital Image Stabilizer | NA |
| | Language | ENGLISH, JAPANESE, TRADITIONAL CHINESE, SIMPLIFIED CHINESE |
| | E-Zoom | 8x |
| | Image Setting | SHARPNESS / MIRROR / FLIP |
| | Privacy Zone Mask | 16 Zones Programmable |
| | Motion Detection | ON:sensitivity, programmable / OFF |
| General | Camera Control Interface | CoC |
| | Lens | 10X Optical Zoom f5.0mm(Wide)~50mm(Tele), F1.8 to F3.0 |
| | Angle of View | H:49.38° (Wide)~5.30° (Tele) |
| | Minimum Working Distance | 1m |
| | Focusing System | Smart Zoom & Auto Focus |
| | Water Resistance | IP66 |
| | Power Supply ; Consumption | 12Vdc, PoC ; 3.36W |
| | Operation ; Storage Temp. | -10° C ~ 50° C ; -20° C ~ 60° C |
| | Operation ; Storage Humidity | Maximum: RH80% ; RH90% |
| | Dimensions | 89(DIA) x 168(L)mm |
| | Net Weight | 700g |

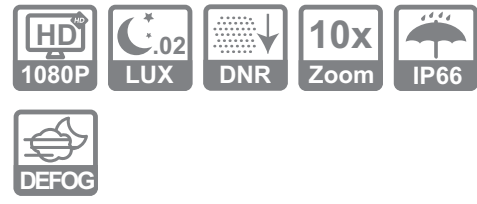

Dimensions Tol:±0.5 Unit:mm

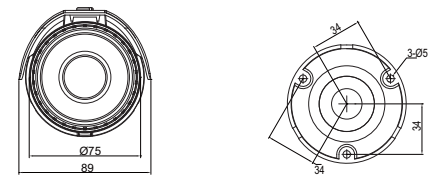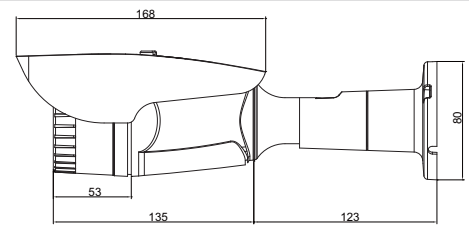

Bracket Options

Accessories

*Specifications are subject to change without notice. _zoom_320076880